

[Products] you can identify with



Flex 600

The Flex 600 is a low profile, small form factor RFID tag designed specifically for attachment to office equipment, IT assets or RTI's. With its superior RF performance, this tag excels in portal applications where the read range can be expanded. In addition, the Flex 600 tag is well suited to indoor applications where a low-cost option is needed.

Applications

With a small footprint and consistent RF performance, the Flex 600 is ideally suited to applications such as:

- Office equipment
- Portals
- Light outdoor use


Physical Specifications

| | |
|-------------------|--|
| Material | White synthetic label with transparent over laminate |
| Size | 50 x 12.5 x 3.8 mm 1.9 x 0.49 x 0.14 in |
| Weight (g) | 0.85 |
| Attachment | Film adhesive (STD) |

Product dimensions shown above are the maximum. Batch to batch variation could be within 5%. Unspliced sections will be within 0.2mm tolerance.

Radiation Patterns

On Metal

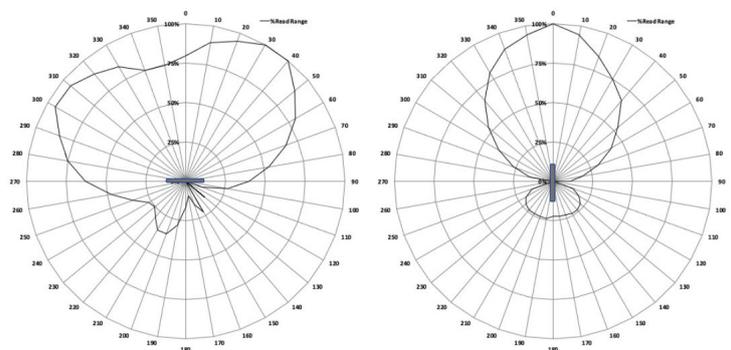

[Products] you can identify with

Environmental Specifications

| | |
|------------------------------|----------------|
| Operating Temperature | -40°C to +85°C |
| IP Rating | IP68 |

Certifications



Operational Specifications

| | |
|-------------------------------------|---|
| Read Range - Fixed Reader | Up to 4.4m (14.4 feet) |
| Read Range - Handheld Reader | Up to 2m (6.5 feet), Up to 3m (9.84 feet) |
| IC Type (Chip) | Monza R6-P |

Ordering Information

| | |
|--|------------------------------|
| Warranty | 1 year |
| Part Number / Order Codes / Order Numbers | EU -CP 14622 US - CP14623 |
| Supply Format | 380 labels / roll |