



永道射频技术股份有限公司
Arizon RFID Technology Co., Ltd.



AZ-H6

Arizon RFID Technology, 100% owned by YFY Group, is a leading company to provide first-class manufacturing services of inlays / tags / tickets and cards for worldwide RFID industry. By 2012 Arizon has produced and delivered more than 1 billion inlays / tags and the number is 10 billion pcs by Apr. of 2019, all products conform to highest quality standards in HF and UHF technology for its valuable customers. Arizon has established inlay/label monthly capacity up to 300 million pieces by 2018, and will continue its strong investments to further boost its monthly production capacity for satisfying the market's fast growing needs.

Overview

Operating Frequency

860MHz-960MHz

Integrated Circuit(IC)

Impinj Monza R6

Antenna Size

68x14mm

2.677x0.551inch

Protocol

EPC Class1 Gen2

ISO/IEC 18000-6C

Application Areas

Brand Protection

Industry/Retail

Supply Chain Management

Electrical Characteristics

Antenna

AZ-H6

Base Material

PET

IC

Impinj Monza

R6

R6-A

R6-P

S6-C

Memory

EPC:

96Bits

96Bits

128(96)Bits

96Bits

User:

0Bits

0Bits

32(64)Bits

32Bits

TID:

48Bits

48Bits

48Bits

48Bits

Unique TID:

48Bits

48Bits

48Bits

48Bits

Access Password:

0Bits

32Bits

32Bits

32Bits

Kill Password:

0Bits

32Bits

32Bits

32Bits

IC Life

100,000 Programming cycles

50 years data retention

Operating Mode

Passive

Frequency

860 ~ 960MHz

Standards

ISO 9001:2008

ISO 14001:2004

OHSAS 18001:2007

Web site: www.arizonrfid.com

Copyright © 2019 Arizon RFID Technology Corporation



All rights reserved





Arizon RFID Technology Co., Ltd.

Frequency Sweep

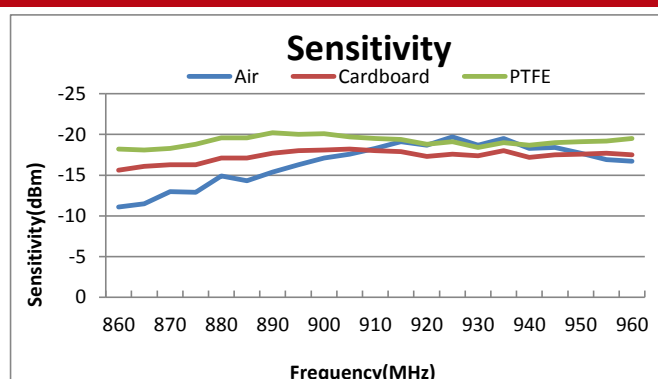
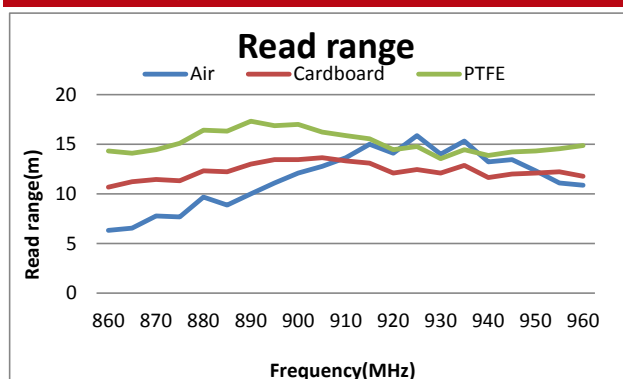


Test power : 4W EIRP

For countries that allow 2W ERP, please reduce the result by 11%

Radiation Patterns

Angular Sensitivity (dBm) ; Power step 0.1dB ; Angle step 10°

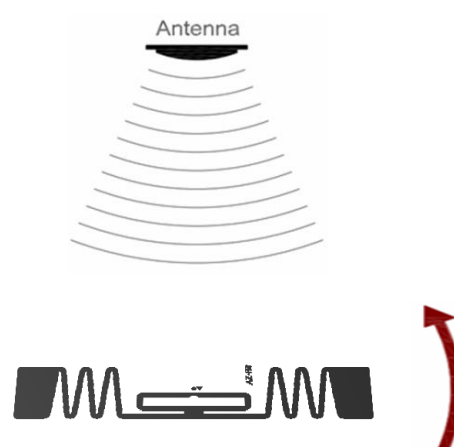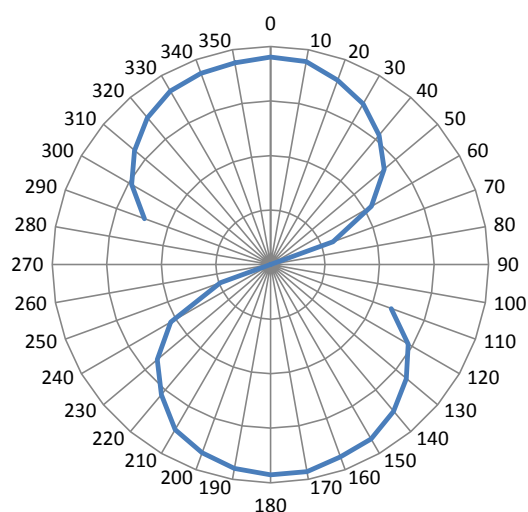

Angular Sensitivity
(Relative Read Range vs. Orientation)

Angular Sensitivity
Inlay is rotated in the x,y axis, fixed in z axis
(Tag shown at 0° with respect to face of antenna)

Usage Method



Arizon RFID Testing Center:

RFID UHF Band: 800-1000MHz; Shielding effectiveness: > 100 dB; Background noise: < -75 dB

Compatible to the following international standard:

EPC Global Class1 Gen2; ISO 18000-6C; GS1 TIPP (Tagged Item Performance Protocol)