




香港商永道無線射頻標籤有限公司台灣分公司

Arizon RFID Technology(Hong Kong)Co.,Ltd.,Taiwan Branch.



AZ-G42

Arizon RFID Technology, 100% owned by YFY Group, is a leading company to provide first-class manufacturing services of inlays /tags / tickets and cards for worldwide RFID industry. By 2012 Arizon has produced and delivered more than 1 billion inlays /tags and the number is 10 billion pcs by Apr. of 2019, all products conform to highest quality standards in HF and UHF technology for its valuable customers.

Arizon has established inlay/label monthly capacity up to 300 million pieces by 2018, and will continue its strong investments to further boost its monthly production capacity for satisfying the market's fast growing needs.

Overview

Operating Frequency

860MHz-960MHz

Integrated Circuit(IC)

Impinj Monza 4QT

Antenna Size

50x30mm

1.969x1.181inch

Protocol

EPC Class1 Gen2

ISO/IEC 18000-6C

Application Areas

Brand Protection Industry/Airlines
and airports Supply Chain
Management

Electrical Characteristics

Antenna

AZ-G42

Base Material

PET

IC

Impinj Monza

4D

4E

4QT

Memory

EPC:

128Bits

96→496Bits

128Bits

User:

32Bits

128Bits

512Bits

TID:

48Bits

48Bits

48Bits

Unique TID:

48Bits

48Bits

48Bits

Access Password:

32Bits

32Bits

32Bits

Kill Password:

32Bits

32Bits

32Bits

IC Life

100,000 Programming cycles

50 years data retention

Operating Mode

Passive

Frequency

860 ~ 960MHz

Standards

ISO 9001:2008

ISO 14001:2004

OHSAS 18001:2007

Web site: www.arizonrfid.com



Copyright ©2019 Arizon RFID Technology Corporation All rights reserved





香港商永道無線射頻標籤有限公司台灣分公司 Arizon RFID Technology(Hong Kong)Co.,Ltd.,Taiwan Branch.

Frequency Sweep

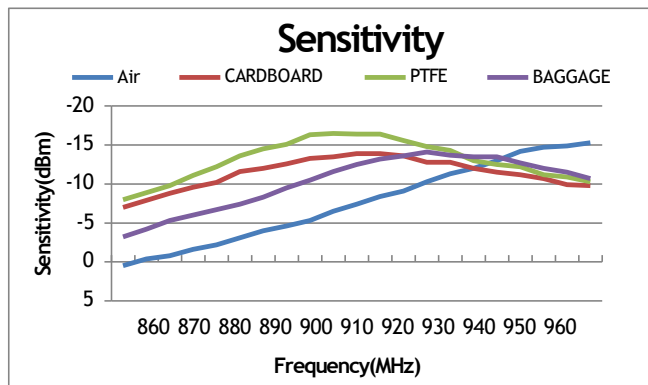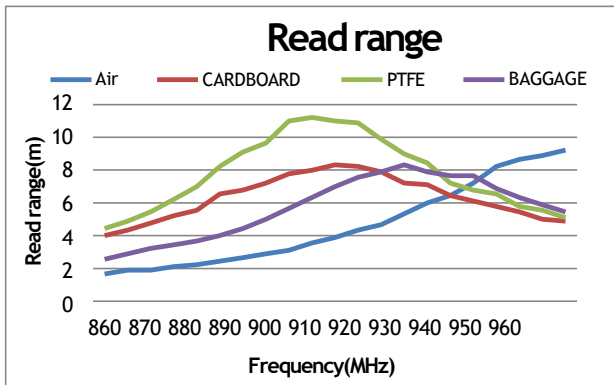


Test power : 4W EIRP


For countries that allow 2W ERP, please reduce the result by 11%

Radiation Patterns

Angular Sensitivity (dBm) ; Power step 0.1dB ; Angle step 10°

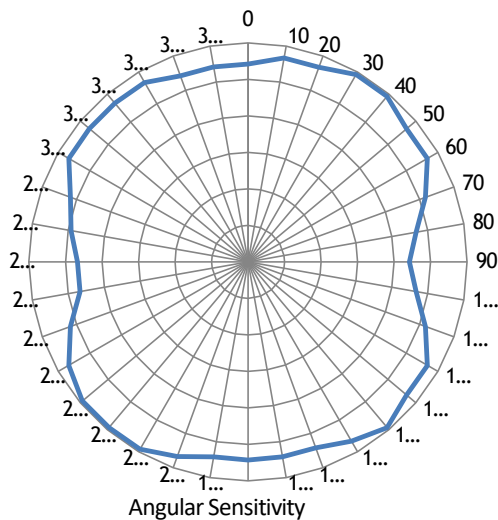

)Relative Read Range vs.Orientation(

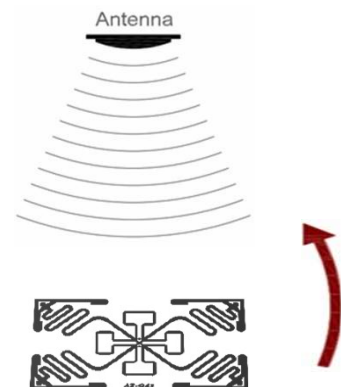

Angular Sensitivity


Inlay is rotated in the x,y axis, fixed in z axis

)Tag shown at 0° with respect to face of antenna(

Usage Method



Baggage



Arizon RFID Testing Center:

RFID UHF Band: 800-1000MHz; Shielding effectiveness: > 100 dB; Background noise: < -75 dB Compatible to the following international standard:

EPC Global Class1 Gen2; ISO 18000-6C; GS1 TIPP (Tagged Item Performance Protocol)